

FM Radio Receiver

DMB-2-FM

RF
IN

VA
OUT

LAN


DO
cont.

Reception level can be checked over the network.
With preset registration and composite output, the
current reception status can be displayed.


- Receives FM radio; audio can be checked on the front
headphone output or taken from the rear LINE output
- The composite output shows the current channel, audio
mode and reception level (7 steps) on a monitor
- Channels can be switched remotely over the network
- A preset registration function lets you also switch
channels with an infrared remote control
- Wide FM supported



¥300,000 (excl. tax)

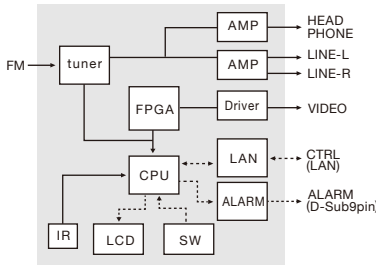

[Dimensional Drawing]

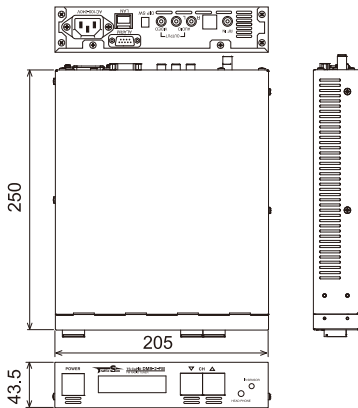

[Specifications]

Product Type	FM Receiver
Product Name	TS CaPID DMB-2-FM
Model Number	DMB2-L2V1HR-FM
Input / Output	Audio output Headphone output (stereo mini jack) Line output (RCA) Video output Composite output (RCA) Contact output D-Sub 9-pin (female) ×1 (close on fault (Make) ×2 open on fault (Break) ×2) * PhotoMOS relay contact output
Power	AC100V~240V
Apparent	20VA
Consumed	12W
Input level range	-80 to -20 dBm
Temp. / humidity	0~40°C, 30~80% (non-condensing)
Dim. W×H×D [mm]	EIA 19-inch rack, 1U half size 205×43.5×250 (excl. protrusions)
Weight	Approx. 1.3 kg
Accessories	AC100V power cable Instruction manual Bundled application CD
Options	Rack mount support angle U-1 (mounts one unit in 1U) Rack mount support angle U-2 (mounts two units together in 1U)
Related products	ISDB-T Demodulator (DMB-2-ISDBT)