

B-CAS / C-CAS Compatible Descrambler

DSCR-2

ASI IN

ASI OUT

LAN

DTTB

BS

110° CS

CATV

B-CAS

C-CAS


CATV descrambling also supported

A descrambler compatible with both the ARIB and JCTEA conditional access systems.


- One selected service in the input TS can be descrambled
- If every service in the TS uses an ECM with the same PID, all services can be descrambled
- EMM (per-subscriber information) supported
- The service to descramble is selected with the front-panel switch on the unit
- Supported packet size : 188 / 204 bytes
- Comes with a control application that shows the descrambler status



¥800,000 (excl. tax)

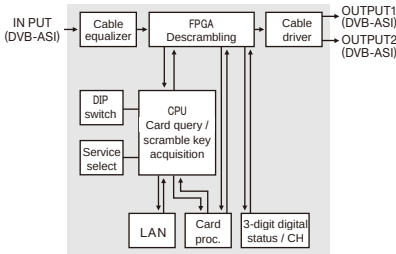

[Dimensional Drawing]

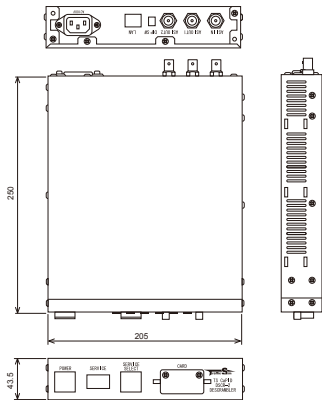

[Specifications]

Product Type	ARIB / JCTEA conditional-access descrambler
Product Name	TS CaPID DSCR-2
Model Number	DSCR2-A120HR
Input / Output	Input: ASI ×1 (packet / burst mode) Output: ASI ×2 (packet mode only) Card slot ×1 Control: LAN ×1
Power	AC100V
Apparent	8VA
Consumed	5W
Temp. / humidity	5–45°C, 30–80% (non-condensing)
Dim. W×H×D [mm]	EIA 19-inch rack, 1U half size 205×43.5×250 (excl. protrusions)
Weight	Approx. 1.3 kg
Accessories	AC100V power cable Instruction manual CD for installing the control application Only the following three B-CAS cards can be used Yellow: limited-use Black: commercial-use White / black: specific commercial-use * CAS card not included
Options	Rack mount support angle U-1 (mounts one unit in 1U) Rack mount support angle U-2 (mounts two units together in 1U)
Related products	DVB-ASI → DVB-SPI Converter (CV-1) ISDB-T Demodulator (DMB-2-ISDBT) ISDB-S Demodulator (DMB-2-ISDBS) 64QAM / 256QAM Demodulator (DMB-2-QAM)