


ACAS Descrambler


DSCR-A-TLV

Descrambles a single TLV that is scrambled with the ACAS system.


- Specify the asset to descramble by Package ID
- Single TLV in over IP; descrambled, then single TLV out over IP
- Multicast input supported
- Multicast and broadcast output supported
 - UI operation from a web browser
- Set the Package ID to descramble
- Check the descrambling status
- Specify the input source and output destination
 - Contact output provided
- Descrambling not possible
- TLV input stopped, etc.

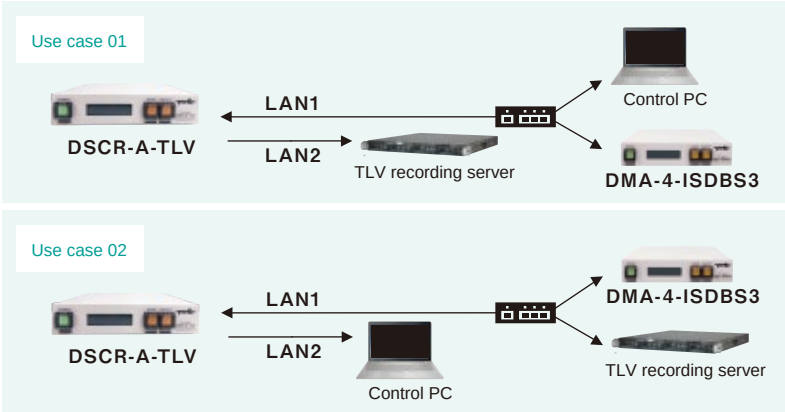

Open price

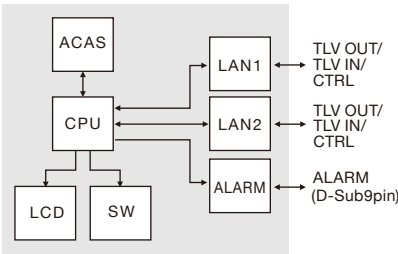

[Dimensional Drawing]

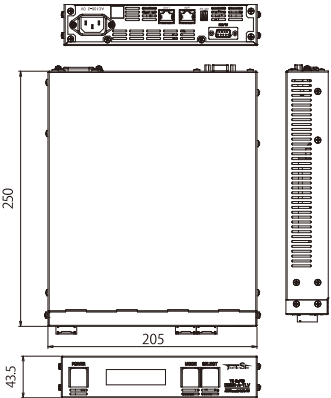

[Specifications]

Product Type	ACAS Descrambler
Product Name	TS CaPID DSCR-A-TLV
Model Number	DSCRA-L2HR
Input / Output	IP input / output (single TLV) / Control RJ45 (10Base-T / 100Base-T / 1000Base-T) ×2 Contact output D-Sub 9-pin ×1 * PhotoMOS relay contact output
Power	AC100-240V
Apparent	15VA
Consumed	11W
Temp. / humidity	0-40°C, 30-80% (non-condensing)
Dim. W×H×D [mm]	EIA 19-inch rack, 1U half size 205×43.5×250 (excl. protrusions)
Weight	1.3kg
Accessories	Power cable Instruction manual
Options	Rack mount support angle U-1 Rack mount support angle U-2
Related products	TLV recording server DMA-4-ISDBS3