

IP-to-TS Conversion Unit

WA-5-IT


RJ45 IN ASI OUT RS 232C

A unit that converts IP into TS.


- Converts the IP output from the WA-5-TI back into TS
- Fanless design
- SPI signal output is available as an option



¥450,000 (excl. tax)

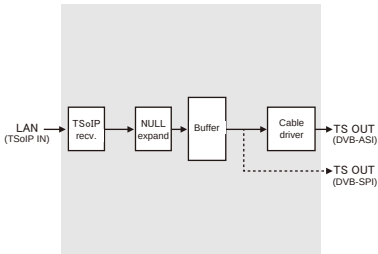

[Dimensional Drawing]

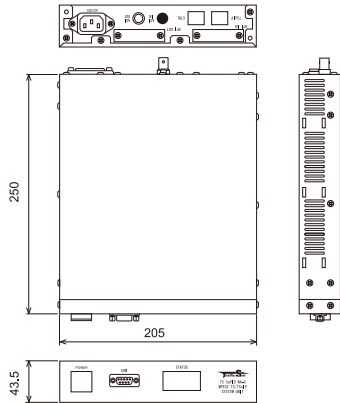

[Specifications]

Product Type	IP → MPEG-2 TS Conversion Unit
Product Name	TS CaPID WA-5-IT
Model Number	WA5-A010S000HR
Input / Output	TSolP input: RJ45 (100BASE-TX) ×1 TS output: DVB-ASI ×1 Other: control LAN port → RJ45 (100BASE-T) ×1 control COM port → RS-232C ×1
Power	AC100V Apparent 17VA Consumed 9W
Temp. / humidity	5-40°C, 30-80% (non-condensing)
Dim. W×H×D [mm]	EIA 19-inch rack, 1U half size 205×43.5×250 (excl. protrusions)
Weight	Approx. 1.2 kg
Accessories	AC100V power cable Instruction manual
Limitation	Maximum bit rate 33 Mbps
Options	Rack mount support angle U-1 (mounts one unit in 1U) Rack mount support angle U-2 (mounts two units together in 1U)
Related products	MPEG-2 TS → TS over IP Conversion Unit (WA-5-TI)