



WA-5-TI



¥450,000 (excl. tax)

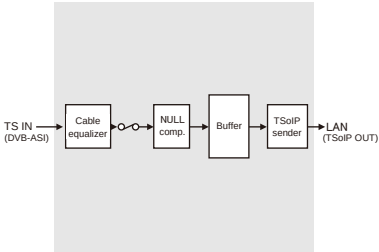

[Dimensional Drawing]

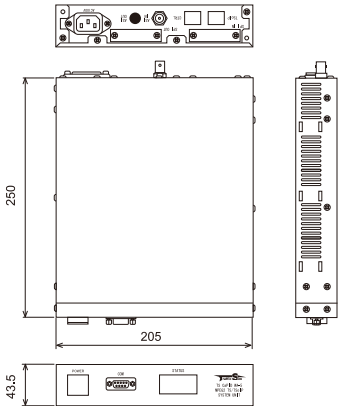

[Specifications]

Product Type	MPEG-2 TS → IP Conversion Unit
Product Name	TS CaPID WA-5-TI
Model Number	WA5-A100S000HR
Input / Output	TS input: DVB-ASI ×1 TSolP output: RJ45 (100BASE-TX) ×1 Other: control LAN port → RJ45 (100BASE-T) ×1 control COM port → RS-232C ×1
Power	AC100V Apparent power 17VA Consumption 9W
Operating temp. / humidity	5–40°C, 30–80% (non-condensing)
Dimensions W×H×D (mm)	EIA 19-inch rack, 1U half size 205×43.5×250 (excl. protrusions)
Weight	Approx. 1.2 kg
Accessories	AC100V power cable User manual
Limitation	Maximum bit rate 33 Mbps
Options	Rack mount support angle U-1 (mounts one unit in 1U) Rack mount support angle U-2 (mounts two units together in 1U)
Related products	TS over IP → MPEG-2 TS Conversion Unit (WA-5-IT)

A unit that converts TS into IP.

- The WA-5-TI converts TS into IP
- NULL packets are compressed during TS-to-IP conversion and restored on the receiving side, which keeps the transmission bit rate down
- One-to-n transmission and reception via multicast
- A proprietary check code handles packet loss that occurs on the network
- Fanless design
- SPI signal input is available as an option